



TECHNICAL DATA

MASSES

Operating mass (incl. ROPS)	16,300 kg
Operating mass (incl. Cab)	16,500 kg
Module mass (front/rear)	10,950 kg/5,550 kg
Max. operating mass	17,400 kg

DIMENSIONS

Drum width	2,130 mm
------------	----------

COMPACTION

Nominal amplitude (high/low)	1.9 mm/1.0 mm
Centrifugal force (high/low amplitude)	330 kN/180 kN
Vibration frequency (high/low amplitude)	29 Hz /30 Hz
SEISMIC available (values for manual mode)	

TRACTION

Speed range (Dual/TC/AS)	4/6/7/11 km/h
Vertical oscillation	±9°
Tyre size (12 ply)	23.1 x 26 TR
Max. theoretical gradeability	53 %
Number of pads	130
Pad height	102 mm
Pad area	146 cm ²

ENGINE



Manufacturer/Model	Cummins B4.5 (Stage V /T4final)
Type	Water cooled turbo Diesel
Rated power, SAE J1995	149 kW (200 hp) @ 2,200 rpm
Fuel tank capacity	255 l
DEF tank capacity	30 l

ENGINE

Manufacturer/Model	Deutz TCD2012L06 (IIIA/T3)
Type	Water cooled turbo Diesel
Rated power, ISO 14396	128 kW (174 hp) @ 2,200 rpm

HYDRAULIC SYSTEM

Driving	Hydrostatic
Vibration	Hydrostatic
Steering	Hydrostatic
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

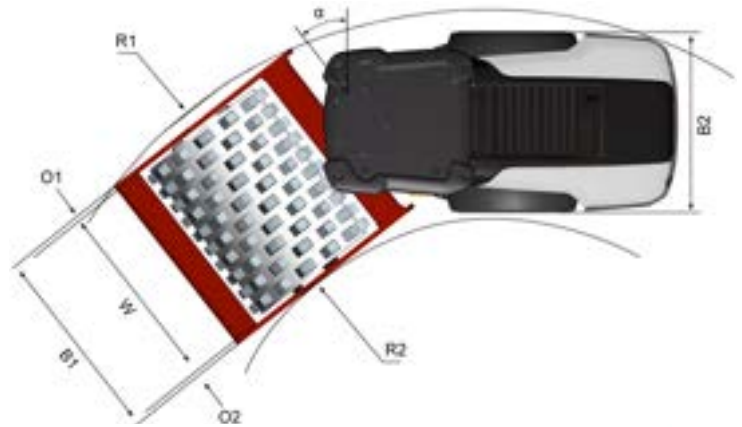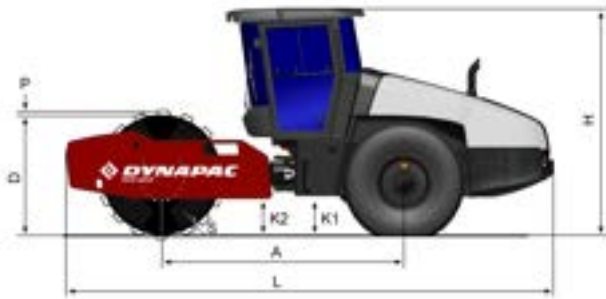

DIMENSIONS

DIMENSIONS

A. Wheelbase	3,100 mm
B1. Width, front	2,340 mm
B2. Width, rear	2,130 mm
D. Drum diameter	1,518 mm
H1. Height, with ROPS/cab	2,890 mm
H2. Height, w/o ROPS/cab	2,130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L1. Length	6,240 mm
L2. Length, with strike-off blade	6,740 mm
O1. Overhang, right	105 mm
O2. Overhang, left	105 mm
P. Pad height	102 mm
R1. Turning radius, outside	5,800 mm
R2. Turning radius, inside	3,300 mm
S. Drum shell thickness	34 mm
W. Drum width	2,130 mm
α. Steering angle	±38°

OPTIONAL EQUIPMENT

Air Conditioning /Automatic Climate Control (ACC) (Optional)

- The system contains fluorinated greenhouse gases.
- Coolant designation: HFC-134a
- Coolant weight when full: 1,35 kg
- CO₂-equivalent: 1,930 ton
- GWP: 1430

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
 The above information is a general description only, all information's are supplied without liability.